


Honeywell® DMXREW1

Label Rewinder/Unwinder

Solo Basculas

SOLUCIONES DE PESO

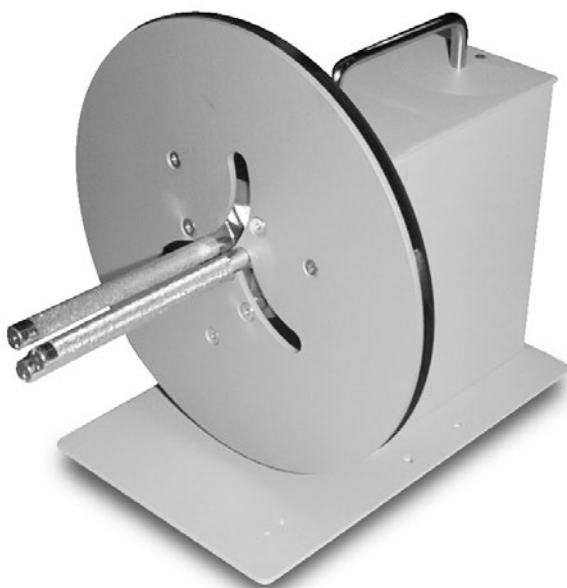

Standard Features

- Rewinds or dispenses label rolls up to 4 in (101.6 mm) wide, up to 8 in (203 mm) diameter at 10 in (254 mm) per second
- Adjustable core holder
- Coreless rewinding
- Steel construction
- Anti-slip feet
- Constant adjustable Torque™ technology
- Bidirectional operation
- ON-OFF start/stop switch
- Inner label flange to keep edge of label web aligned as labels are rewound
- Compatible with all Datamax-O'Neil® I Series and Rice Lake SURVIVOR® SST printers

Specifications

Label Width:

Up to 4.5 in (113 mm)

Maximum Label Roll Weight:

8.5 lb (3.9 kg)

Label Roll Diameter:

Up to 8 in (200 mm)

Core Diameter:

Use any cardboard core from 1 to 4 in (25 to 102 mm)

Speed:

Up to 10 ips (25+ mm/sec)

Switch adjustable rewind force

No adjustments are required

Start/Stop:

Convenient ON-OFF switch

Direction:

Bidirectional

Power Requirements:

115 VAC 60 Hz

Overall Size:

(L × W × H)

11.00 × 9.00 × 6.00 in

(279 × 152 × 229 mm)

Weight:

13 lb (5.9 kg)

Approvals:

UL listed, CSA certified

Warranty:

Parts and labor: one-year limited

Approvals



Part Number/Price

Part #	Description	Est. Weight	Price
68517	Honeywell® REW1 label rewinder/unwinder, 115 VAC	13 lb	Consult