



Approvals


C FM US APPROVED



Part Number/Price

Part#	Description	Price
91779	JB4ES excitation trim junction box	Consult
89446	Board only	Consult
165271	Enclosure only (includes cord grips and filter)	Consult
165271		

Note: Do not mix junction box models or use other brands of junction boxes with Rice Lake junction boxes. There is a risk of system instability.

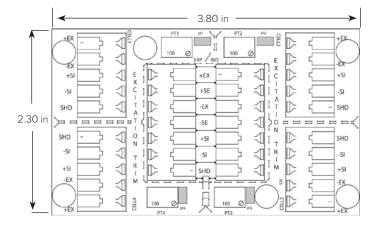



Standard Features

- Jumpers to enable trimming
- PreVent[™] breather vent
- Conformal coated circuit board
- Number of cells: Two, three or four single cells
- Expansion port

Applications

• Floor, tank, hopper scales

Specifications

Cable Fittings:

(4) PG7 0.118 to 0.255 strain relief (2) PG11 0.197 to 0.394 strain relief

Rating/Material:

NEMA Type 4X Stainless steel

Temperature Range:

Operating: 0 °F to 122 °F (-18 °C to 50 °C)

Connectors:

Spring clamp screwless, 12 to 28 AWG **Trimming:**

Individual cell, excitation trim

Potentiometers:

100 ohm, 25-turn cermet

Circuit Board:

 3.8×2.3 in, with conformal coating

Warranty: One-year limited

Approvals: cFMus

5.75 in 0.25 in (4) 0.25 in (