



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
7 kg	72764	2 lb	Consult
15 kg	72767	2 lb	Consult
20 kg	72769	2 lb	Consult
30 kg	72771	2 lb	Consult
50 kg	72776	2 lb	Consult
75 kg	72777	2 lb	Consult
100 kg	72778	2 lb	Consult
OIML with Metric Threads			
3 kg	121396	2 lb	Consult
5 kg	121397	2 lb	Consult
7 kg	121398	2 lb	Consult
10 kg	121399	2 lb	Consult
15 kg	121400	2 lb	Consult
20 kg	121401	2 lb	Consult
30 kg	121402	2 lb	Consult
50 kg	121403	2 lb	Consult
75 kg	124835	2 lb	Consult
100 kg	121404	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
3 to 100	150.3	25.4	39.9	19.1	19.1	19.1	33.8	99.6	11.4

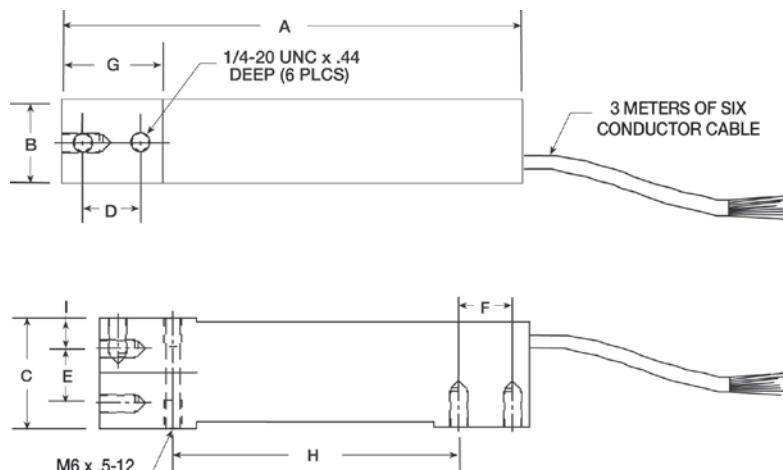

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RLSP4*page 158

RICE LAKE WEIGHING SYSTEMS

RL1042.....page 161

VPG® TEDEA-HUNTLEIGH

1042.....page 313

*Color code is different

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

350 ohm

Material/Finish:

Anodized Aluminum

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohm

Deflection at Capacity:

0.015 in

Cable Length:

10 ft

Cable Diameter:

0.190 in PVC jacket

Cable Color Code:

Blue +Excitation

Black -Excitation

White +Signal

Red -Signal

Green +Sense

Grey -Sense

Warranty:

One-year limited

Approvals:

FM

NTEP

OIML