

Picture is a representation of actual product.

Approvals




Available
upon
request

Order Information

Load Rating	Part #	Est. Weight	Price
OIML C3			
10 kg	36173	2 lb	Consult
20 kg	36174	2 lb	Consult
50 kg	36175	2 lb	Consult
100 kg	36176	2 lb	Consult
200 kg	36177	2 lb	Consult
OIML D1			
5 kg	36172	2 lb	Consult

Dimensions

Rated Capacity	H	L	L1	L2	L3	L4	L5	L6	W	W2	D
kg/mm											
5 to 200	31.0	123.0	18.0	82.0	9.9	21.0	45.0	27.9	42.0	20.1	8.2

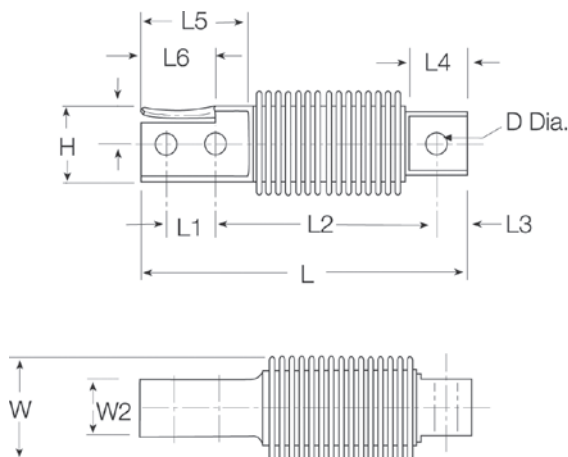

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL9018SS page 107

RICE LAKE WEIGHING SYSTEMS

RLHBB**

VPG® REVERE

SHB page 253

VPG® TEDEA-HUNTLEIGH

355 page 309

METTLER TOLEDO®

MTB***

** Except for 500 kg

** Color code is different

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

356 ohm

Input Resistance:

350 to 400 ohm

Material/Finish:

Stainless steel

Temperature:

Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 V DC (15 V maximum)

Combined Error:

0.05% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

10 ft

Cable Diameter:

0.190 in PVC jacket

Cable Color Code:

Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Grey -Sense

Warranty:

One-year limited

Approvals:

FM
OIML
Ex (available upon request)