



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
25 lb	61116	2 lb	Consult
50 lb	61117	2 lb	Consult
100 lb	61118	2 lb	Consult
200 lb	61119	2 lb	Consult
250 lb	61120	2 lb	Consult
300 lb	61121	2 lb	Consult
500 lb	61122	2 lb	Consult
750 lb	61123	2 lb	Consult
1,000 lb	61124	2 lb	Consult
1,500 lb	61125	2 lb	Consult
2,000 lb	61126	2 lb	Consult
2,500 lb	61127	2 lb	Consult
3,000 lb	61128	2 lb	Consult
5,000 lb	61129	4 lb	Consult
10,000 lb	61130	5 lb	Consult
15,000 lb	61131	7 lb	Consult
20,000 lb	61132	18 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E
lb/in					
25 to 200	1/4-28 UNF	0.65	0.50	2.00	2.50
250 to 300	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 2,000	1/2-20 UNF	1.00	0.75	2.00	3.00
2,500 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.75
15,000	1-14 UNS	1.50	1.25	4.00	5.50
20,000	1 1/4-12 UNF	2.25	2.00	5.00	7.00

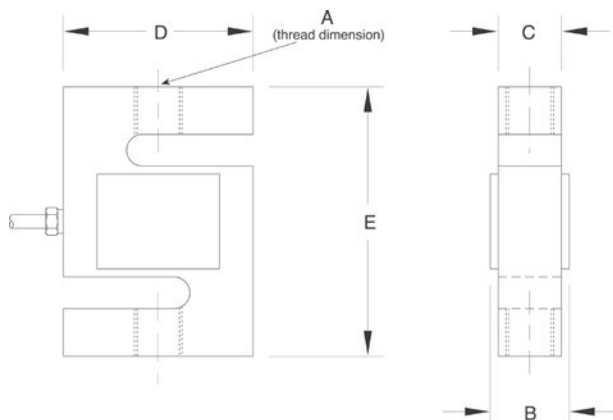

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL20001I page 95

VPG® CELTRON

STC.....page 188

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

ITCM Isolated Tension

Cell Mount..... page 28

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

349 to 355 ohm

Input Resistance:

343 to 450 ohm

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 V DC (15 V maximum)

Combined Error:

0.03% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Diameter:

0.200 in

Polyurethane jacket

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

One-year limited

Approvals:

cFMus

NTEP