



Picture is a representation of actual product

### Approvals




### Order Information

| Load Rating | Part # | Est. Weight | Price   |
|-------------|--------|-------------|---------|
| 500 kg      | 69315  | 3 lb        | Consult |
| 1 t         | 69316  | 3 lb        | Consult |
| 1.5 t       | 69317  | 3 lb        | Consult |
| 2 t         | 69318  | 3 lb        | Consult |
| 2.5 t       | 69319  | 3 lb        | Consult |

### Dimensions

| Rated Capacity | L    | L1   | L2   | L3   | W    | W1   | H    | D    | T          |
|----------------|------|------|------|------|------|------|------|------|------------|
| kg-t/in        |      |      |      |      |      |      |      |      |            |
| 500 to 2.5     | 5.12 | 1.00 | 3.00 | 0.50 | 1.50 | 1.25 | 1.25 | 0.53 | M12 x 1.75 |

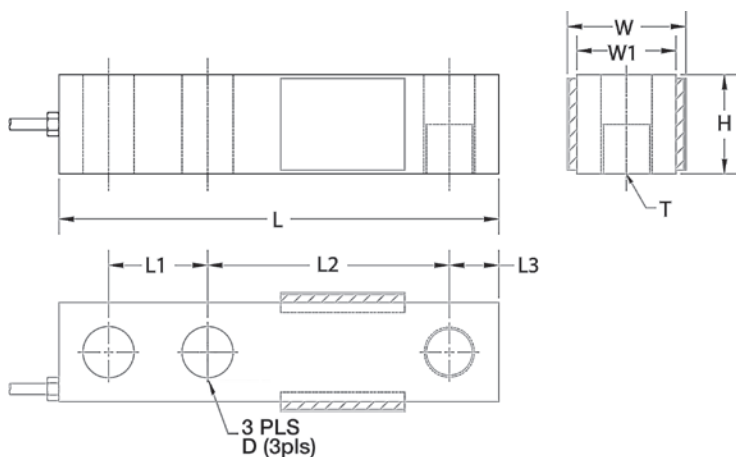

### Specifications

#### Full Scale Output:

3.0 mV/V

#### Output Resistance:

350 ( $\pm 3$ ) ohm

#### Input Resistance:

385 ( $\pm 5$ ) ohm

#### Material/Finish:

High-alloy steel, nickel plated

#### Temperature:

Compensated range

14 °F to 104 °F (-10 °C to 40 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

#### Seal Type:

Environmentally sealed, IP67

#### Safe Overload:

150% full scale

#### Safe Sideload:

100% full scale

#### Rated Excitation:

5 to 10 VAC/DC (15 V maximum)

#### Combined Error:

0.025%

#### Insulation Resistance:

5,000 megohm

#### Cable Length:

20 ft

#### Cable Diameter:

0.200 in

Polyurethane jacket

#### Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

#### Warranty:

One-year limited

#### Approvals:

cFMus

OIML