




Picture is a representation of actual product

Order Information

Load Rating	Part #	Est. Weight	Price
500 lb	69326	2 lb	Consult
750 lb	69327	2 lb	Consult
1,000 lb	69328	2 lb	Consult
1,500 lb	69329	2 lb	Consult
2,000 lb	69330	2 lb	Consult
2,500 lb	69331	2 lb	Consult
3,000 lb	69332	2 lb	Consult
5,000 lb	69333	4 lb	Consult
10,000 lb	69334	4 lb	Consult

Dimensions

Rated Capacity	A	B	D	E
lb/in				
500 to 3,000	1/2-20 UNF	1.00	2.00	2.97
5,000 to 10,000	3/4-16 UNF	1.00	3.00	4.25

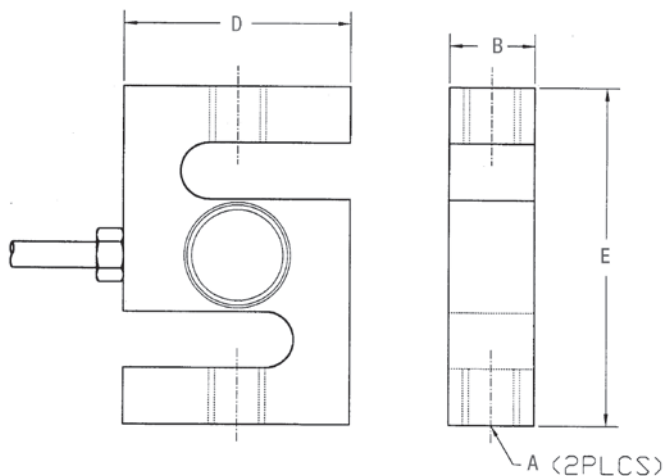

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

ITCM-Isolated Tension Cell Mount..... page 28

Specifications

Full Scale Output:

2.0 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

385 (± 5) ohm

Material/Finish:

Stainless steel

Temperature:

Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Welded-seal, IP67

Safe Overload:

150% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.05%

Insulation Resistance:

5,000 megohms

Cable Length:

20 ft

Cable Diameter:

0.200 in
Polyurethane jacket

Cable Color Code:

Red +Excitation
Black -Excitation
Green +Signal
White -Signal

Warranty:

One-year limited