



Picture is a representation of actual product

Pictured with integral foot for 250lb-2,000lb

Approvals**Order Information**


Load Rating	Part #	Est. Weight	Price
NTEP Certified			
250 lb*	69380	3 lb	Consult
500 lb*	69381	3 lb	Consult
1,000 lb*	69382	3 lb	Consult
2,000 lb*	99314	3 lb	Consult
2,500 lb	69383	3 lb	Consult
4,000 lb	69384	3 lb	Consult
5,000 lb SE	69385	3 lb	Consult
5,000 lb	69386	8 lb	Consult
10,000 lb	69387	8 lb	Consult
15,000 lb	69388	8 lb	Consult
20,000 lb	69389	9 lb	Consult
Conduit Adapters (must be factory installed to maintain warranty)			
1/4-18 NPT	31534	1 lb	Consult

SE=Small envelope

* Load cell has an integral foot

Dimensions

Rated Capacity	C	H	H1	L	L1	L2	L3	L4	T	W
lb/in										
250 to 5,000 SE	0.53	1.23	0.67	5.12	0.62	1.00	3.00	2.25	1/2-20 UNF	1.23
5,000 to 15,000	0.78	1.45	0.70	6.75	0.75	1.50	3.75	3.12	3/4-16 UNF	1.50
20,000	1.06	1.95	0.98	8.75	1.00	2.00	4.75	4.00	1-12 UNF	1.95

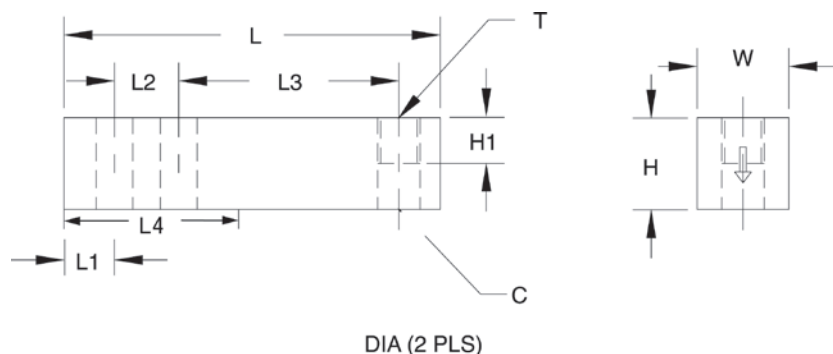

DIA (2 PLS)

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RL39123**page 111**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

RL50210TA..... page 31

RICE LAKE WEIGHING SYSTEMS

RL1800 Series page 42

** Non-NTEP Certified

Specifications**Full Scale Output:**

3.0 mV/V

Output Resistance:

350 (± 3.5) ohm

Input Resistance:

350 (± 3.5) ohm

Material/Finish:

Stainless steel

Temperature:

Compensated range

0 °F to 150 °F (-18 °C to 65 °C)

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Non-repeatability:

0.01% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

20 ft

Cable Color Code:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

One-year limited

Approvals:

cFMus

NTEP