

SINGLE POINT RL1385

Stainless Steel, Environmentally Sealed, NTEP Certified 1:4,500 Class III Single Cell, IP67

Solo Basculas
SOLUCIONES DE PESO



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
10 kg	41405	3 lb	Consult
15 kg	41233	3 lb	Consult
30 kg	41234	3 lb	Consult
50 kg	41235	3 lb	Consult
75 kg	41236	3 lb	Consult
Non-NTEP Certified			
100 kg	41237	3 lb	Consult
200 kg	41406	4 lb	Consult

Dimensions

Rated Capacity	H	H1	L	L1	L2	L3	L4	L6	W	T	T2
kg/mm											
10 to 100	40.0	10.0	150.0	100.0	19.0	32.0	6.0	20.0	25.4	1/4-20 UNC x 19.1 DP	N/A
200	40.0	10.0	150.0	100.0	19.0	32.0	6.0	20.0	38.1	1/4-20 UNC x 19.1 DP	25.4

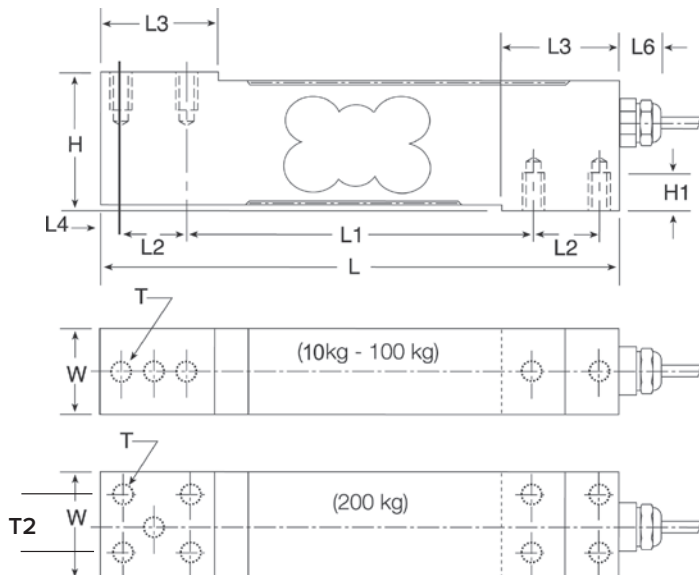

Interchangeable Products

FLINTEC
PC1.....page 216

Specifications

Full Scale Output:
2.0 mV/V

Output Resistance:
330 (± 25) ohm

Input Resistance:
390 (± 20) ohm

Material/Finish:
Stainless steel

Temperature:
Operating range
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally sealed, IP67

Safe Overload:
200% full scale

Rated Excitation:
5 VDC (15 V maximum)

Combined Error:
0.02% full scale

Insulation Resistance:
5,000 megohm

Cable Length:
10 ft

Cable Diameter:
0.196 in polyurethane jacket

Max Platform Size:
18 × 18 in

Cable Color Code:
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield

Warranty:
Two-year limited

Approvals:
FM
NTEP 00-125