

680HE Synergy Series

Hostile Environment Digital Weight Indicator

Solo Basculas
SOLUCIONES DE PESO



Approvals




Part Number/Price

Part #	Description	Est. Weight	Price
197177	680HE Plus indicator, 115 to 230 VAC	6.25 lb (3 kg)	Consult
199574	680HE Plus indicator, 115 to 230 VAC with external RJ45	6.25 lb (3 kg)	Consult

Options/Accessories

Part #	Description	Price
195084	Analog output option card	Consult

Dimensions			
A	12.50 in (317.5 mm)	D	13.00 in (330.2 mm)
B	10.50 in (266.7 mm)	E	8.00 in (203.2 mm)
C	6.30 in (160.0 mm)		

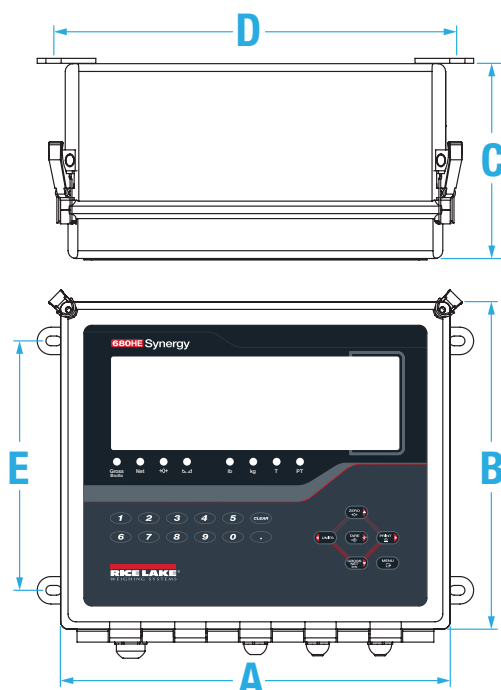

Standard Features

- LED display
- Battery backed time and date
- Full numeric keypad
- Multiple communication ports
- Eight setpoints, 22 configurable types
- Numeric keyed entry for tare and setpoint entry
- Formattable tickets
- Four onboard configurable digital I/O points, TTL logic
- Local/remote

Options

- Ethernet bulkhead connector
- Analog output: 16-bit resolutions, 0-10 VDC, 0-20 mA, 4-20 mA

Specifications

Power:

Line voltages: 100 to 240 VAC
Frequency: 50/ 60 Hz

Power Consumption:

12W (AC) with one 350 ohm load cell, 30W max

Excitation Voltage:

10 VDC (± 5 VDC)

Analog Signal Input Range:

-0.5 mV/V to +7 mV/V

Analog Signal Sensitivity:

1 µV/graduation recommended

A/D Sample Rate:

6.25 to 120 Hz, software selectable

Resolution:

Internal: 8,000,000 counts
Display: 100,000

System Linearity:

Within 0.01% full scale

Digital I/O:

Four configurable I/O-5V logic

Communication Ports:

Two RS-232 (three-wire)
RS-485/422 (five-wire)
Micro USB (device)
Ethernet TCP/IP (10/100)

Annunciators:

Eight LED annunciators

Display:

Six 2.5 in tall, seven-segment digits

Keys/Buttons:

Flat membrane panel, tactile feel
(18 buttons)

Dimensions:

(L × W × H)
12.50 × 6.30 × 10.50 in
(318 × 160 × 267 mm)

Temperature Range:

Certified: 14 °F to 104 °F (-10 °C to 40 °C)
Operating: 14 °F to 122 °F (-10 °C to 50 °C)

Rating/Material:

IP66, FRP

Weight:

7.9 lb (3.5 kg)

Warranty:

Two-year limited

EMC Immunity:

10 V/m

Approvals:

NTEP CC 19-021, Class III/IIIL, 10,000d
Measurement Canada AM-6121C
cULus Listed
CE Marked