


Star® TSP 847

Receipt Thermal Printer

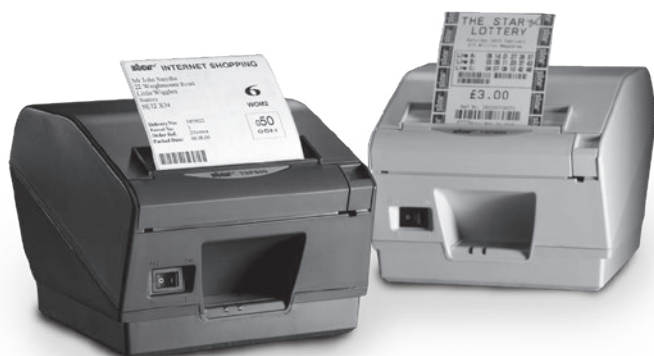

Part Number/Price

| Part # | Description | Est. Weight | Price |
|--------|---|-------------|---------|
| 107617 | TSP847D-24 line receipt printer (requires power supply) | 5 lb | Consult |

Options/Accessories

| Part # | Description | Price |
|---------------|---|---------|
| 69903 | Power supply, PS-60-24A | Consult |
| 72309 | Power supply, 12 VDC with car adaptor | Consult |
| 107618 | Thermal paper 4.4 in wide, 4 in OD | Consult |
| Cables | | |
| 15547 | Blunt-end 25-pin D-sub male RS-232 | Consult |
| 15568 | 25-pin D-sub male to 25 pin D-sub male RS-232 serial interface cable (Rice Lake indicators) | Consult |
| 72440 | 25-pin male to nine-pin female | Consult |

Standard Features

- Direct thermal
- Small desktop footprint
- Jam-proof patented cutter with full or partial cut
- Wide area printing
- Zoom raster drive allows letter-sized documents to be printed in 4.4 format
- Logo storage capability

Specifications

Print Speed:

1,200 dots per second (150 mm/sec)

Paper Width:

Max 104 mm

Resolution:

203 dpi

Bar Codes:

Code 39, Interleaved 2 of 5, JAN/EAN/UPC, Code 128, Code 93, Coderbar, GS1-128

Emulation:

Star, DP8340

Roll Paper:

Paper width: 111.5 mm (4.4 in)

Thickness: 65 to 150

Diameter: 4 in

Drivers:

Windows® 9X, 2000, XP, Linux, OPOS, JPOS, Mac OSX™

Interface:

RS-232 serial (DB-25F)

Operating Temperature:

41 °F to 113 °F (5 °C to 45 °C)

Dimensions:

(W × D × H)

7 × 8.4 × 5.8 in

(180 × 213 × 148 mm)

Weight:

5 lb

Approvals:

RoHS compliant

Warranty:

Three-year limited