



Cups not included with load cell,
sold separately

Picture is a representation of actual product

Approvals




Available
upon
request

Order Information

Load Rating	Part #	Est. Weight	Price
OIML			
30 T	151312	5 lb	Consult
40 T	151313	5 lb	Consult
50 T	151314	5 lb	Consult
Options			
Load Cup Set (Upper and Lower)	160452	6 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F
T/mm						
30 to 50	150	70	40	87	69	R200

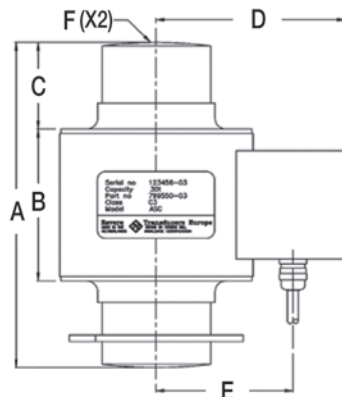

Specifications

Full Scale Output:

2.00 (± 0.02) mV/V

Output Resistance:

700 (± 7) ohm

Input Resistance:

700 (± 35) ohm

Material/Finish:

Stainless steel

Temperature:

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Hermetically sealed, IP68

Safe Overload:

150% full scale

Rated Excitation:

5 to 20 VDC

Combined Error:

0.02% full scale

Insulation Resistance:

5,000 megohm

Cable Length:

15 m

Cable Diameter:

0.295 in polyurethane jacket

Cable Color Code:

Green +Excitation

Black -Excitation

White +Signal

Red -Signal

Warranty:

One-year limited

Approvals:

cFMus

OIML

Ex (available upon request)