

Picture is a representation of actual product

#### Approvals




#### Order Information

| Load Rating | Part # | Est. Weight | Price   |
|-------------|--------|-------------|---------|
| 1,000 lb    | 21538  | 5 lb        | Consult |
| 2,000 lb    | 21539  | 5 lb        | Consult |
| 5,000 lb    | 21540  | 5 lb        | Consult |
| 10,000 lb   | 21541  | 10 lb       | Consult |

#### Dimensions

| Rated Capacity | C    | W    | C1             | H    | L    | L1   | L2   | L3   | L4   | CONDUIT ADAPTER |
|----------------|------|------|----------------|------|------|------|------|------|------|-----------------|
| lb/in          |      |      |                |      |      |      |      |      |      |                 |
| 1,000 to 5,000 | 0.53 | 1.44 | 1.19 x 0.56 DP | 1.88 | 8.00 | 4.00 | 0.75 | 2.50 | 3.87 | 1/4-18NPT       |
| 10,000         | 0.88 | 1.88 | 1.63 x 0.62 DP | 2.75 | 9.25 | 4.62 | 0.81 | 2.62 | 4.87 | 1/4-18NPT       |

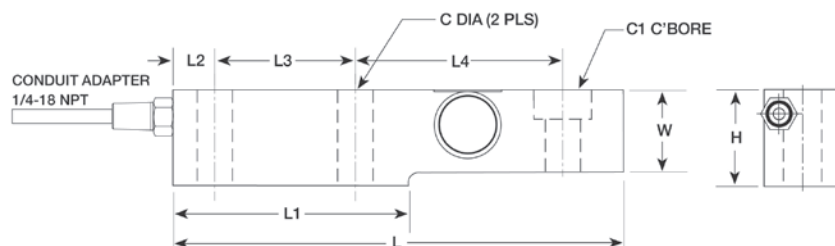

#### Interchangeable Products

RICE LAKE WEIGHING SYSTEMS

RLSSB.....page 116

HBK®

SB3

#### Weigh Module Available

RICE LAKE WEIGHING SYSTEMS

RL1900 Series.....page 45

#### Specifications

##### Full Scale Output:

2.0 mV/V

##### Output Resistance:

350 (± 3.5) ohm

##### Input Resistance:

350 (± 3.5) ohm

##### Material/Finish:

Stainless steel

##### Temperature:

Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)

##### Seal Type:

Welded-seal, IP67

##### Safe Overload:

150% full scale

##### Safe Sideload:

100% full scale

##### Rated Excitation:

5 to 10 VDC (15 V maximum)

##### Combined Error:

0.02% full scale

##### Non-repeatability:

0.01% full scale

##### Insulation Resistance:

5,000 megohm

##### Deflection at Capacity:

0.018 in

##### Cable Length:

15 ft

##### Cable Color Code:

Green +Excitation  
Black -Excitation  
White +Signal  
Red -Signal

##### Warranty:

One-year limited

##### Approvals:

cFMus  
NTEP