

VPG TEDEA HUNTLEIGH, 1240, Stainless Steel, Environmentally Sealed, IP64



Picture is a representation of actual product

### Approvals





### Order Information

Load Rating	Part #	Est. Weight	Price
200 kg	47880	3 lb	Consult
250 kg	47881	3 lb	Consult

### Dimensions

Rated Capacity	A	B	C	D	E	F	G	I	J	H	M
kg/mm											
200 to 250	150.1	39.9	86.6	43.4	38.1	25.4	6.35	25.4	38.1	1/4-20 UNC × 13 DP	1/4-28 UNF × 10 DP

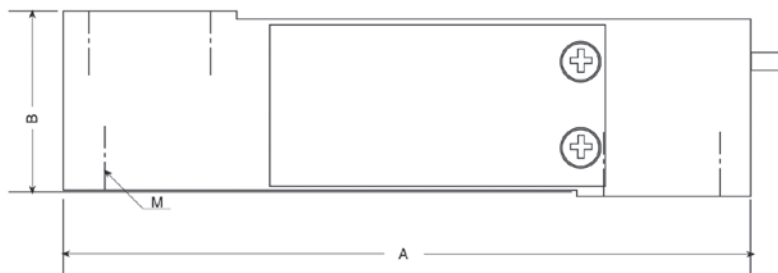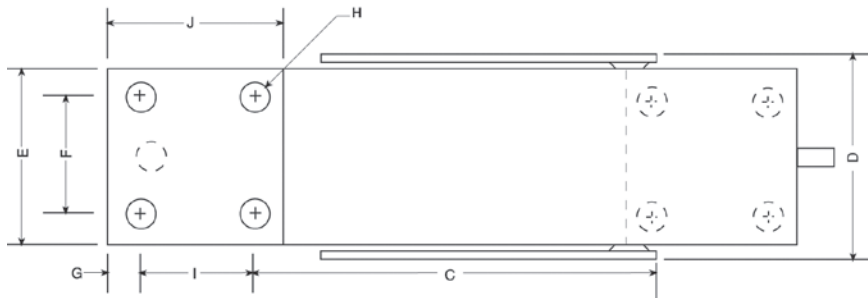

### Specifications

**Full Scale Output:**

2.0 mV/V

**Output Resistance:**

351 (± 5) ohm

**Input Resistance:**

380 (± 15) ohm

**Material/Finish:**

Stainless steel

**Temperature:**

Operating range

0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**

Environmentally sealed, IP64

**Safe Overload:**

150% full scale

**Rated Excitation:**

5 to 10 VDC (15 V maximum)

**Combined Error:**

0.02% full scale

**Insulation Resistance:**

2,000 megohm

**Deflection at Capacity:**

0.015 in

**Cable Length:**

10 ft

**Cable Diameter:**

0.200 in

PVC jacket

**Cable Color Code:**

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Brown -Sense

**Platform Size:**

15.5 × 15.5 in

**Warranty:**

One-year limited

**Approvals:**

cFMus